


# ICFAL SERIES Indoor Lighting

## ICFAL-4

AIRTIGHT FIRE-RATED NEW CONST. LED RECESSED LIGHT HOUSING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

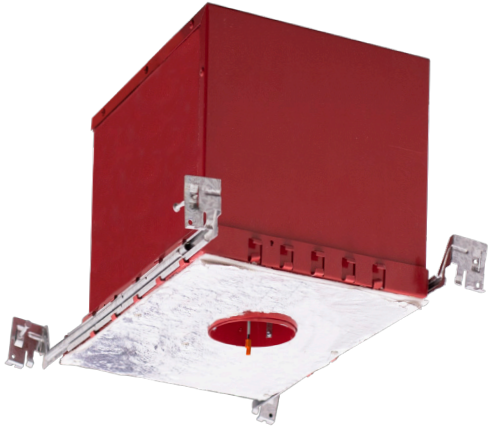


Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

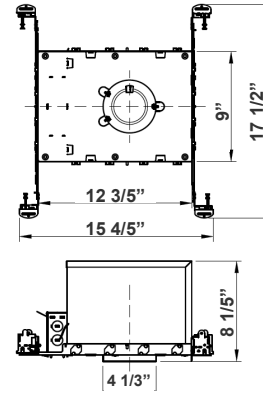

17 1/2" (H) x 15 4/5" (W) x 4 1/3" (D)

4" Type IC fire-rated new construction LED housing. Compatible with LED lamps with quick connector. 2-hour fire-rated & air-tight certified.

## Features

- Type IC Rated for Direct Contact With Insulation; Complies With The Standard of UL for Luminaires (UL 1598)
- ETL Listed for 2-Hour Fire Resistance to Meet and Exceed
- Strict Fire UL 263 Safety Code
- Meets Title 24 Requirements
- Rated for Direct Contact With IC Insulation
- LED quick connector provided
- ETL ASTM E283/E283M-19 Air Tight certified
- Integrated Non-Combustible Insulation Acts As a Sound Barrier Minimizing Sound Transfer Between Floors
- Trims and Inserts Sold Separately

## Technical Specifications

### Electrical:

- Voltage: 120V or 277V
- Wattage: 14W

### Mechanical:

- Double wall IC rated for direct contact with insulation.
- For use in IC and non-IC conditions
- Housing adjusts in frame to accommodate up to 1 1/2" ceiling thickness
- Airtight housing with gasket to restrict airflow in accordance with ASTM E-283 air-tight requirements
- Suitable for Damp Locations

### Junction Box:

- Pre-wired #21 gauge galvanized steel junction box with (7) 1/2" knockouts and (4) Romex® knockouts and removable plates

### Hanger Bars:

- Pre Installed hanger bars with True Nail easy installation in regular lumber, engineered lumber, and Laminated Beams. Integral T-bar slots for easy installation in T-Bars. Spans up 24" and can be repositioned 90°. Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while easily aligning the housings with the joists

### Applications:

- Designed for ceiling plenums where 2x8 joists or taller are used
- High strength hanger bars can easily be nailed to joists
- Suitable for T-grid and drop ceiling applications
- See installation sheet for detailed information

### Other Models:

- 22W | ICFAL-6




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co



## Other Views:



Side View




Top View



Back View



## Westgate Compatible Recessed Trims:

RDP4

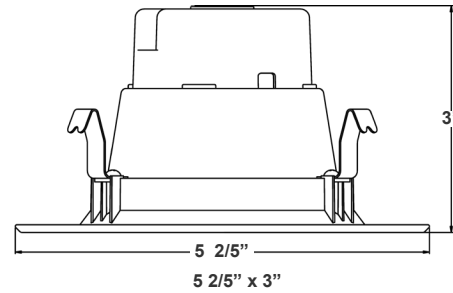

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDPF4-MCT5	10W	120V	800LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDPS4-MCT5	10W	120V	800LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K

RDL4-ST




5 1/4" x 3 1/5"

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL4-ST-MCT5	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-ST-MCT5-ORB	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-ST-MCT5-BK	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K





## Westgate Compatible Recessed Trims:

RDL4-BF

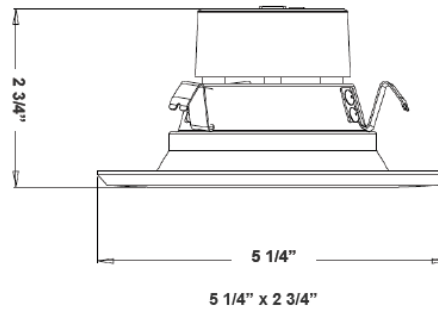

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL4-BF-MCT5	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-BF-MCT5-ORB	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-BF-MCT5-BK	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-BF-27K	10W	120V	650LM	2700K
RDL4-BF-30K	10W	120V	680LM	3000K
RDL4-BF-30K-ORB	10W	120V	680LM	3000K
RDL4-BF-35K	10W	120V	720LM	3500K
RDL4-BF-41K	10W	120V	746LM	4100K
RDL4-BF-50K	10W	120V	761LM	5000K

RDL4-WP

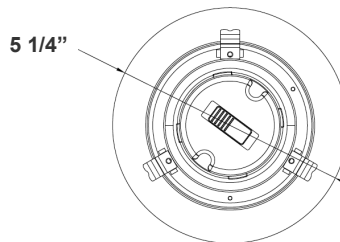


5 1/4" x 3 1/5"

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL4-MCT5-WP	8W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-27K-WP	12W	120V	650LM	2700K
RDL4-30K-WP	12W	120V	700LM	3000K
RDL4-35K-WP	12W	120V	725LM	3500K
RDL4-41K-WP	12W	120V	750LM	4100K
RDL4-50K-WP	12W	120V	800LM	5000K
RDL4-65K-WP	12W	120V	850LM	6500K



## Westgate Compatible Recessed Trims:

RDL4-ADJ

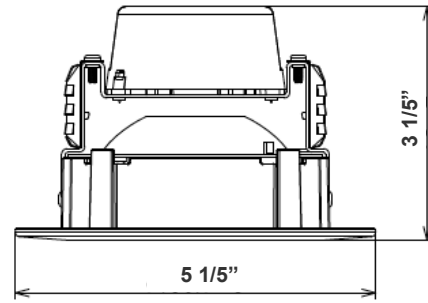


5 1/5"(D) x 3 1/5"(H)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL4-ADJ-MCT5	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-ADJ-27K	10W	120V	650LM	2700K
RDL4-ADJ-30K	10W	120V	650LM	3000K
RDL4-ADJ-41K	10W	120V	650LM	4100K
RDL4-ADJ-50K	12W	120V	650LM	5000K

## OTHER MODEL: ICFAL-6



Side View



Top View



Back View