


LLHB

TECHNICAL SPECIFICATIONS:

- :: Housing: Steel
- :: Lens: Clear PMMA
- :: With V-hook
- :: LED SMD type: Edison 2835
- :: Driver: Tovin
- :: Input Voltage: 120V~277V AC
- :: Dimmable

FEATURES:

- :: Avoid initial labor cost by replacing the fluorescent tube with this compatible tube.
- :: Ideal for offices, showrooms, refrigerators, cove lighting, etc.

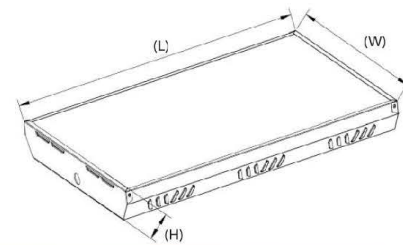

LLHB-90W



LLHB-120W
LLHB-180W
LLHB-240W

LED LINEAR HIGH BAYS

CATALOG NO.	WATTS	LUMENS/WATT	LUMENS	COLOR TEMP	DIMENSIONS
LLHB-90W-50K-D	90W	135LM/W	14400LM	5000K	23-3/4"(L) x 16"(W) x 2-3/4"(H)
LLHB-90W-40K-D	90W	135LM/W	14400LM	4000K	
LLHB-120W-50K-D	120W	125LM/W	15198LM	5000K	47-7/8"(L) x 11-1/4"(W) x 3-7/8"(H)
LLHB-120W-40K-D	120W	125LM/W	15198LM	4000K	
LLHB-180W-50K-D	180W	125LM/W	22907LM	5000K	47-7/8"(L) x 15-7/8"(W) x 3-7/8"(H)
LLHB-180W-40K-D	180W	135LM/W	22907LM	4000K	
LLHB-240W-50K-D	240W	125LM/W	30722LM	5000K	47-7/8"(L) x 20-1/2"(W) x 3-7/8"(H)
LLHB-240W-40K-D	240W	125LM/W	30722LM	4000K	

ACCESSORIES

CATALOG NO.	DESCRIPTION
LLHB-OC1	Standard motion sensor with manual settings, 120/277V 800/1300W max
LLHB-OC-BL	Bi-level dimming motion sensor adjustable with remote, 120/277V 800/1200W max
LLHB-OC-REMOTE	Remote control for bi-level motion sensor
LLHB-SMK	Surface mounting kit for LLHB series. 1 Pair of L bracket with screws
CH-1212	Steel jack chain, 100ft., 12GA, (Meets weight requirements for linear high bays)
FH-E	Steel fixture hangers, 10GA, Top
H-SCREW	Steel flat hanger screw with single hole, 1/4" x 3"

