




Surface Mount
Bracket Included

DIMENSIONS:

47.72"(L)X11.70"(W)X1.09"(H)

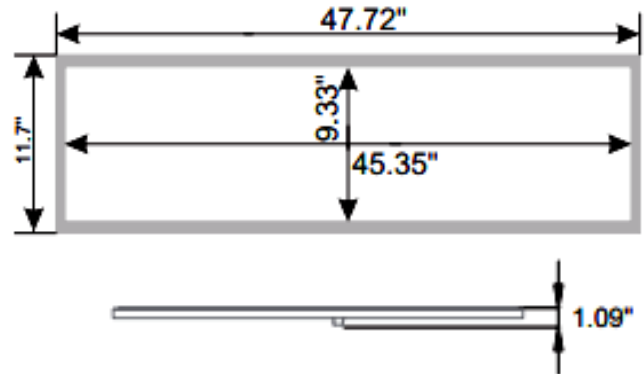

- LPS-1X4-50K-D
- LPS-1X4-40K-D
- LPS-1X4-30K-D

LED SURFACE MOUNT PANELS

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W
- Power factor: >0.95
- Efficacy: 100LM/W

HOUSING SPECIFICATIONS:

- White Finish
- Internal Driver
- Mounting Options: Surface mount, Recessed Mount
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: DLC, ETL



MODEL	WATTS	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
LPS-1X4-50K-D	40W	120~277VAC	4000LM	5000K
LPS-1X4-40K-D	40W	120~277VAC	4000LM	4000K
LPS-1X4-30K-D	40W	120~277VAC	4000LM	3000K

OPTIONAL ACCESSORY:



LPS-JBOX

MODEL	DESCRIPTION
LPS-JBOX	Optional Junction Box for T-Bar installation

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimmable
- Recommended Dimmers: DIVA-DVTV(LUTRON), NOVA T NTSTV-DV(LUTRON), IP710-DL(LEVITON)
- Total lumens: 4000LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >80

WARRANTY: 5 years

