

JOB NAME: _____


DATE: _____

TYPE: _____



DIMENSIONS:

4" DAIMETER

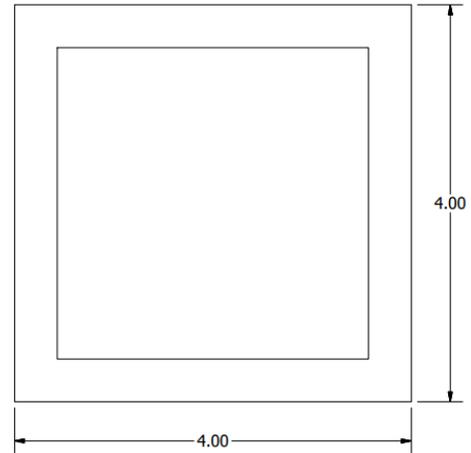

PL12S-30K-WH
PL12S-40K-WH
PL12S-50K-WH

4" SQUARE SLIM PUCK LIGHT

Ideal for under cabinet, display cases or in low profile areas.

ELECTRICAL SPECIFICATIONS:

- Working Voltage: 12V
- Wattage: 3.5W
- Efficacy: 65LM/W

HOUSING SPECIFICATIONS:

- PC Housing with white finish
- 3.3 ft. cord with male socket
- Mounting: Recessed
- Screwless Trim

LIGHTING SPECIFICATIONS:

- Total lumens: 230LM
- color temperature: 3000K/4000K/5000K
- Beam Angle: 120°

CERTIFICATIONS:



WARRANTY: 3 years

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
PL12S-30K-WH	3.5W	12V	230LM	3000K
PL12S-40K-WH	3.5W	12V	230LM	4000K
PL12S-50K-WH	3.5W	12V	230LM	5000K

OPTIONAL ACCESSORIES:



MODEL	DESCRIPTION
PL12-SPLIT3-WH	3-Hole mini splitter with female socket & 40" cord, white
PL12-SPLIT3-BK	3-Hole mini splitter with female socket & 40" cord, Black
PL12-SPLIT6-WH	6-Hole mini splitter with female socket & 40" cord, white
PL12-SPLIT6-BK	6-Hole mini splitter with female socket & 40" cord, Black
PL12-SPLIT10-WH	10-Hole mini splitter with female socket & 40" cord, white
PL12-SPLIT10-BK	10-Hole mini splitter with female socket & 40" cord, Black
PL12-PF-WH	6" Power feed cord, White
PL12-PF-BK	6" Power feed cord, Black
PL12-PIDR-12W-WH	12W Plug-in driver with switch, white
PL12-PIDR-12W-BK	12W Plug-in driver with switch, Black
PL12-PIDR-24W-WH	24W Plug-in driver with switch, white
PL12-PIDR-24W-BK	24W Plug-in driver with switch, Black
PL12-ILDMR-WH	In-Line dimming control, White
PL12-ILDMR-BK	In-Line dimming control, Black
PL12-HWDR-25W-D	Dimmable driver, 100-240V

