

JOB NAME: _____

DATE: _____

TYPE: _____




Down Light

SCLT-4FT-40W-35K-D
SCLT-4FT-40W-40K-D
SCLT-4FT-40W-50K-D

DIMENSIONS:

2.5"(H) x 9.3"(W) x 47.3"(L)

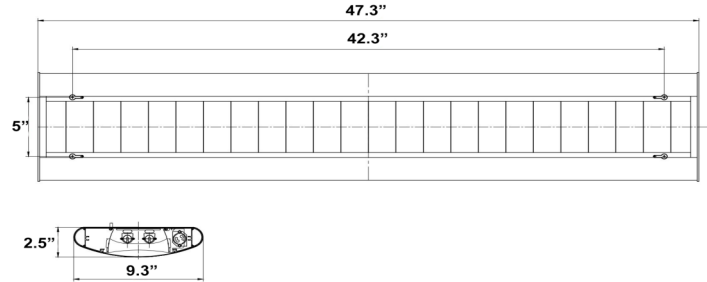

LED PARABOLIC SUSPENDED LIGHT, 120-277V

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W
- Power factor: >0.95
- Efficacy: 115LM/W

HOUSING SPECIFICATIONS:

- Anodized aluminum
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP20

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SCLT-4FT-40W-35K-D	40W	120~277V AC	4,400 LM	3500K
SCLT-4FT-40W-40K-D	40W	120~277V AC	4,400 LM	4000K
SCLT-4FT-40W-50K-D	40W	120~277V AC	4,400 LM	5000K



MODEL	DESCRIPTION
SCLP-CB	Coupling Bracket (Not Included)

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: Translucent Lens
- Total lumens: 4400 LM
- Color temperature: 3500K/4000K/5000K
- Color rendering index: >80

WARRANTY: 5 years




SCLT-4FT-40W-35K-D
SCLT-4FT-40W-40K-D
SCLT-4FT-40W-50K-D
SCLT-CB

LED PARABOLIC SUSPENDED LIGHT,120-277V

PHOTOMETRICS CHARTS:

Luminous Intensity Distribution Curve

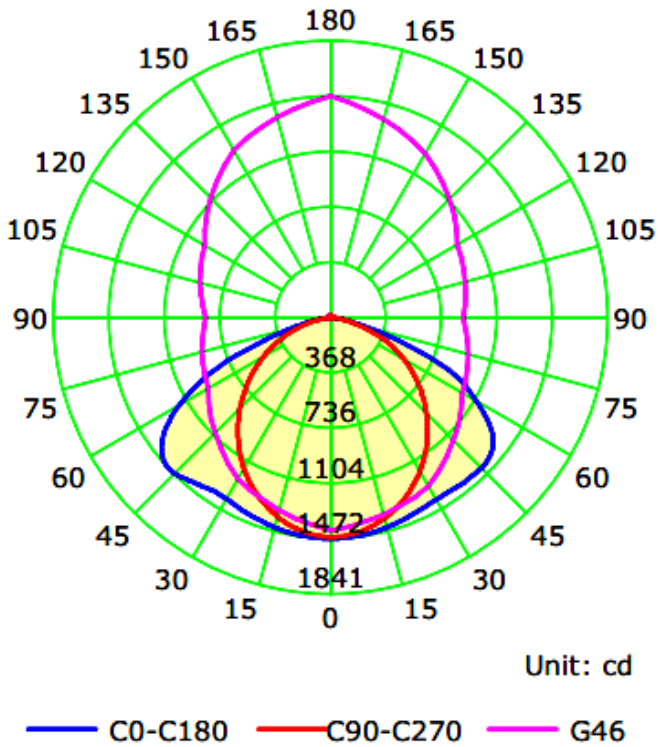

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SCLT-4FT-40W-35K-D	40W	120~277V AC	4,400 LM	3500K
SCLT-4FT-40W-40K-D	40W	120~277V AC	4,400 LM	4000K
SCLT-4FT-40W-50K-D	40W	120~277V AC	4,400 LM	5000K

Illuminance at a Distance

